
PLEASE READ BEFORE ASSEMBLING!

Tip #1: Make sure you've taken all the pieces and hardware out of its packaging before discarding the box.

Tip #2: Using page 2 and/or page 3 of instruction manual make sure all pieces and hardware are accounted for.

Tip #3: Read manual before assembling, it helps!


ITEM#:223109

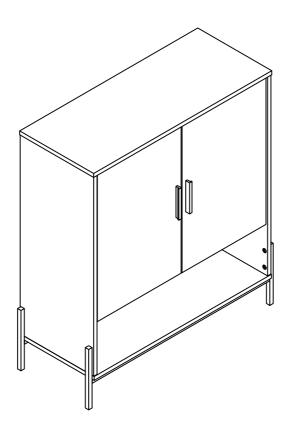

VERSION: 20220713 PAGE 1 OF 9

PARTS IDENTIFICATION

ITEM#:223109

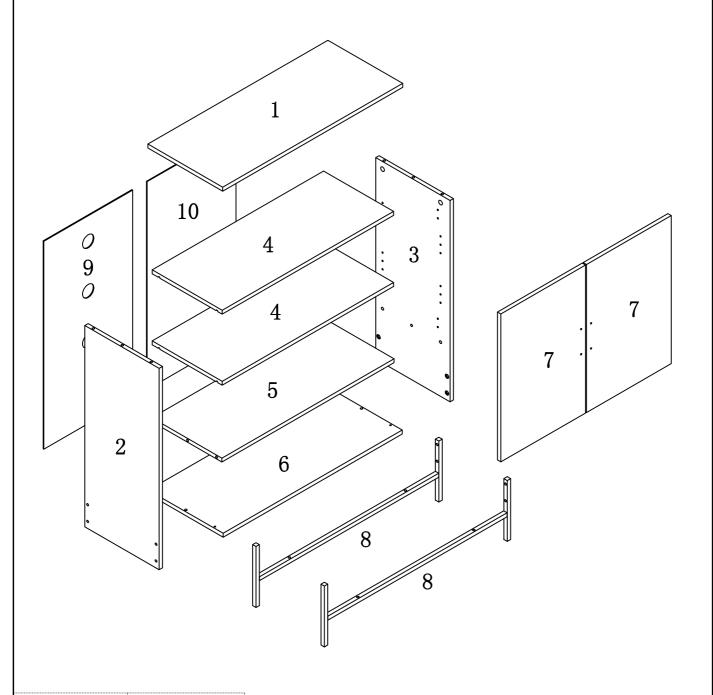

- (1) 1pc
- (2) 1pc
- (3) 1pc
- (4) 2pcs
- (5) 1pc
- (6) 1pc

- (7) 2pcs
- (8) 2pcs
- (9) 1pc
- (10) 1pc

PAGE:2 OF 9


HARDWARE IDENTIFICATION

ITEM#:223109

A		L29	8pcs
В		ø 15	8pcs
С		Ø 8x25	6pcs
D	000	Ø 22	12pcs
Е	*)20000000-	Ø 4x40	4pcs
F	(a)	M6x25	12pcs
G		301C	4pcs
Н	(s))))))	Ø 4x16	24pcs
I		Ø 5x15	8pcs
J	0===>		30pcs
K		96#	2pcs
L	 0	Ø 4x20	4pcs
M		197x5x1	1pc
N		Ф8х40	1pc
0	<u> </u>	12x12x1	2pcs
P	⊘ 111111111111111111111111111111111111	Ф 5х40	1pc
Q	(s)	Ф4х25	1pc


PAGE:3 OF 9

ITEM#:223109




STEP1

STEP2

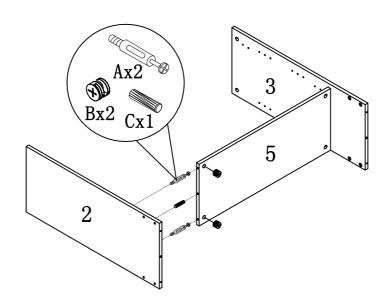


PAGE:4 OF 9

ITEM#:223109

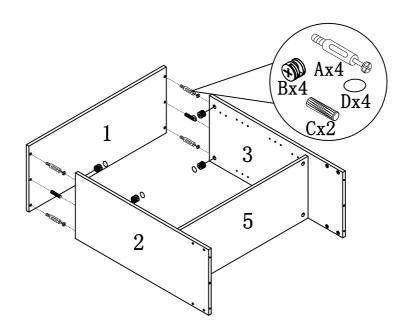


STEP3

STEP4

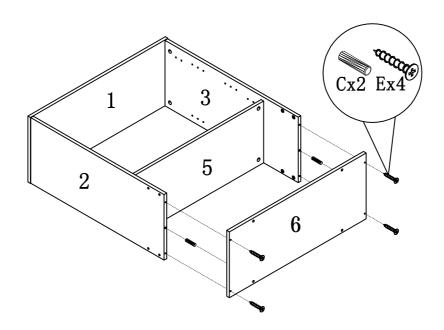


PAGE:5 OF 9

ITEM#:223109

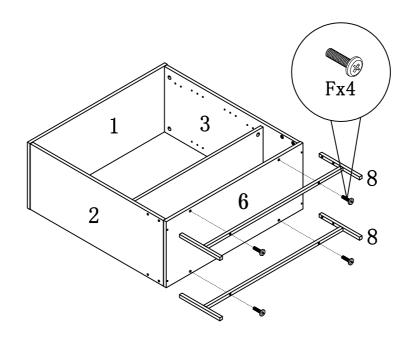


STEP5

STEP6

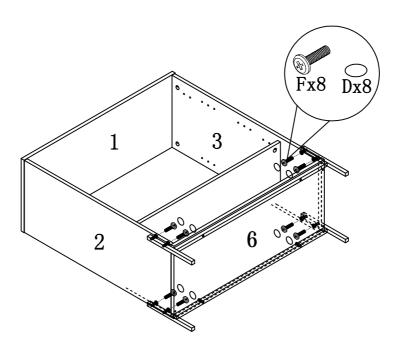


PAGE:6 OF 9

ITEM#:223109

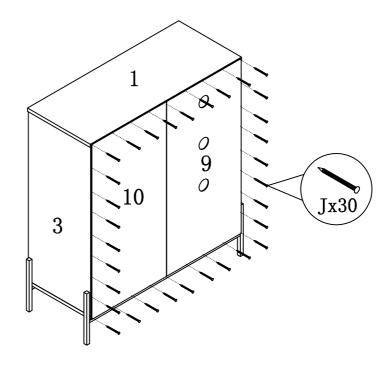


STEP7


STEP8

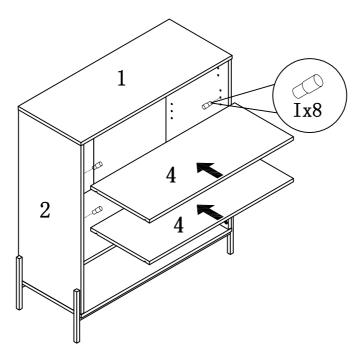

PAGE:7 OF 9


ITEM#:223109

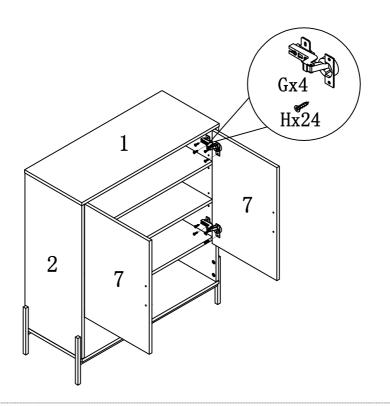



STEP9

STEP10

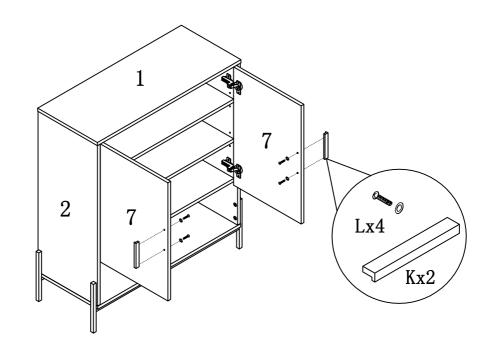

PAGE:8 OF 9

ANTI-TIPPING STRAP INSTRUCTION

HARDWARE (INCLUDED):

TOOLS NEEDED (NOT INCLUDED):

DRYWALL ANCHOR \$\phi 8X40 X 1PC



DRILL & DRILL BIT



METAL BRACKETS 12×12×1 X 2PCS



LIGHT HAMMER



DRYWALL SCREW Ø5X40 X 1PC




STRAP $197 \times 5 \times 1$ X 1PC


 $\{\}$

FLATHEAD SCREW \$\phi 4X25 X 1PC


Note: Hardware included only compatible with standard drywalls.




1. Find spot on wall 1" below top of item. 2. Using a drill bit slightly thinner than anchor ,drill hole into drywall.



1. Use a light hammer to tap anchor into hole.
2. Anchor should fit snugly. If hole is too small, drill again to increase hole size . Do not force anchor into wall.



- Insert drywall screw into metal bracket and into drywall anchor.
 Insert flathead screw into second me
- 2. Insert flathead screw into second metal bracket and into back of item. along top edge.



1. Insert strap thru bracket attached to wall. then thru bracket on item, and into head of strap. 2. pull lightly til strap stops.

Assembly is complete.

PAGE:9 OF 9